

Three-terminal positive voltage regulator


FEATURES

- Maximum output current IOM: 0.1A
- Output voltage VO: -5V
- Continuous total dissipation
PD: 0.625 W (T_a = 25 °C)

MECHANICAL DATA

- Case: TO-92 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any

TO-92

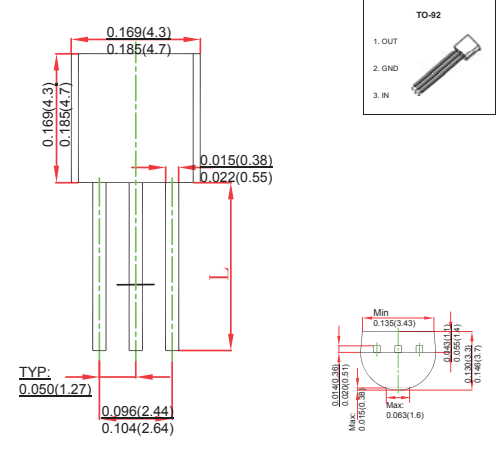

ABSOLUTE MAXIMUM RATINGS

(Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V _i	-30	V
Thermal Resistance from Junction to Ambient	R _{θJA}	200	°C/W
Operating Junction Temperature Range	T _{OPR}	0~+150	°C
Storage Temperature Range	T _{STG}	-65~+150	°C


ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE

(V_I = -10V, I_o = 40mA, C_i = 0.33 F, C_o = 0.1 F, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	V _o	25°C	-4.8	-5.0	-5.2	V
		-7V < V _i < -20V, I _o = 1mA ~ 40mA	-4.75	-5.0	-5.25	V
		I _o = 1mA ~ 70mA	-4.75	-5.0	-5.25	V
Load Regulation	ΔV _o	I _o = 1mA ~ 100mA	25°C	20	60	mV
		I _o = 1mA ~ 40mA	25°C	10	30	mV
Line Regulation	ΔV _o	-7V < V _i < -20V	25°C	15	150	mV
		-8V < V _i < -20V	25°C	12	100	mV
Quiescent Current	I _q	25°C			6	mA
Quiescent Current Change	ΔI _q	-8V < V _i < -20V	0-125°C		1.5	mA
	ΔI _q	1mA < V _i < 40mA	0-125°C		0.1	mA
Output Noise Voltage	V _N	10Hz < f < 100KHz	25°C	40		μV/V _o
Ripple Rejection	RR	-8V < V _i < -18V, f = 120Hz	0-125°C	41	49	dB
Dropout Voltage	V _d	25°C		1.7		V

* Pulse test.

TYPICAL APPLICATION

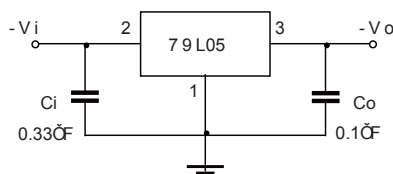


Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.


RATINGS AND CHARACTERISTIC CURVES

TYPICAL APPLICATION


Output Characteristics

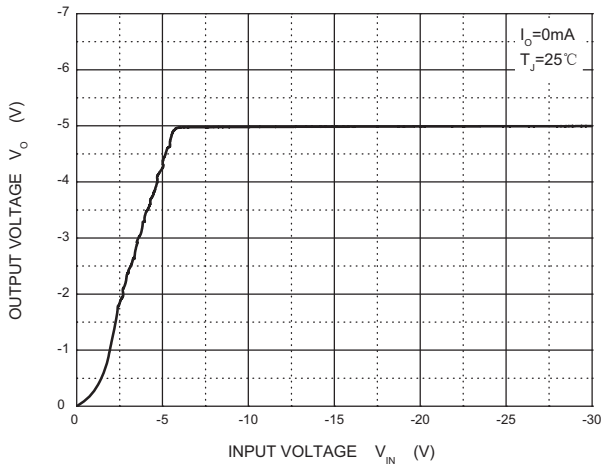


Dropout Characteristics

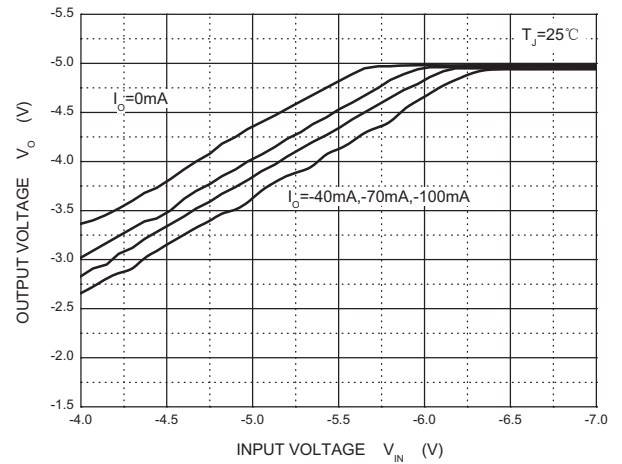


Quiescent Current vs Input Voltage

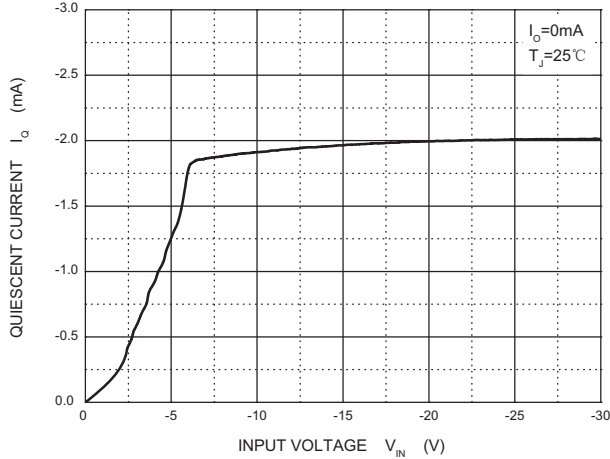

Current Cut-off Grid Voltage

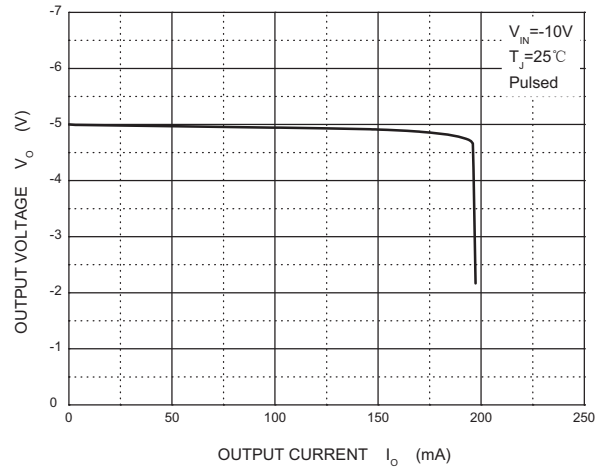

Output Voltage vs Junction Temperature

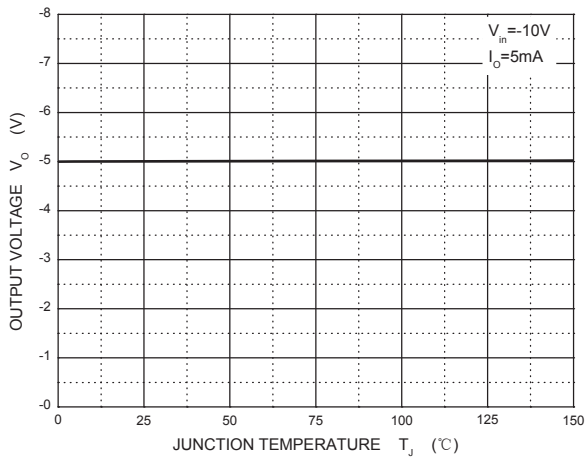

Power Derating Curve

